


# FH-30001 / 30002 / 30003 / 30004


## 2 to 200 MHz 0°/180° Hybrids

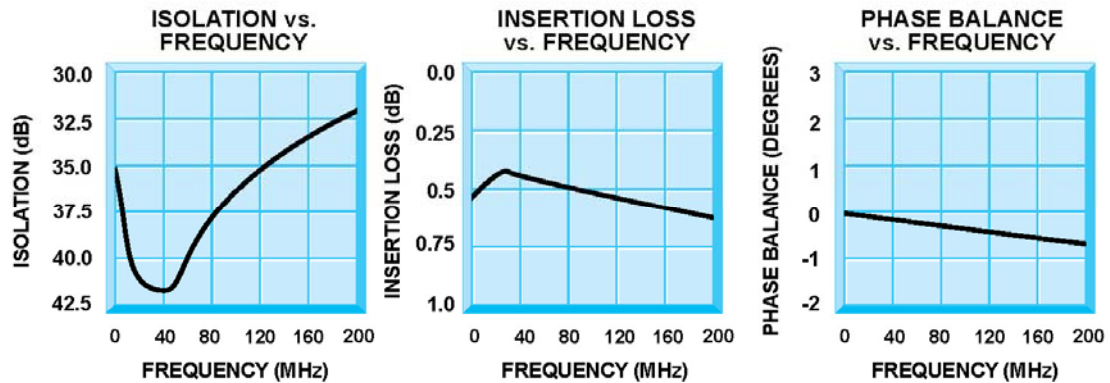

### Guaranteed Specifications (-54° to +85°C)


Frequency Range	2 to 200 MHz
Isolation	30 dB Min.
Insertion Loss	0.75 dB Max.
VSWR	1.3:1 Max.
Phase Balance	±2° Max.
Amplitude Balance	± 0.2 dB Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

### Functional Schematic



### Mechanical Outline

#### FH-30001

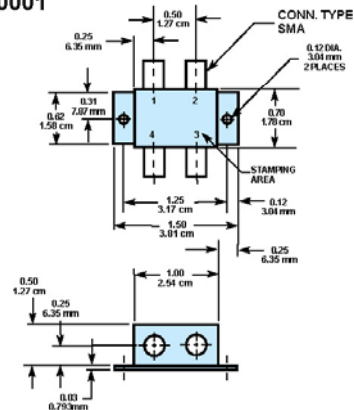

Additional Mechanicals on Next Page




# FH-30001 / 30002 / 30003 / 30004


## 2 to 200 MHz 0°/180° Hybrids

### Mechanical Outline


FH-30002

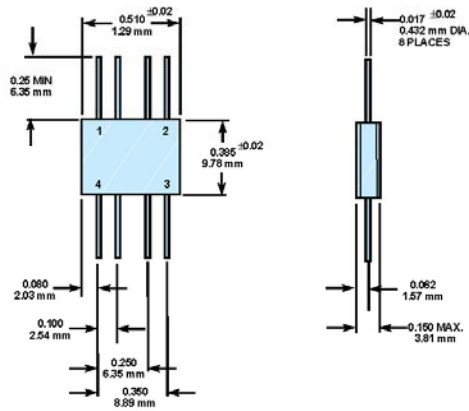

FH-30003

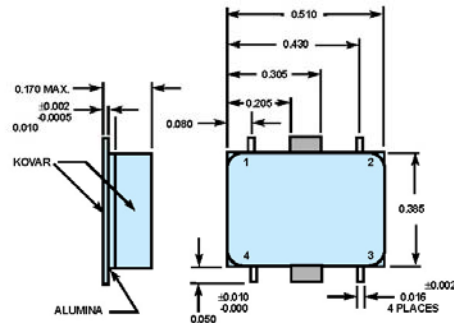


FH-30004

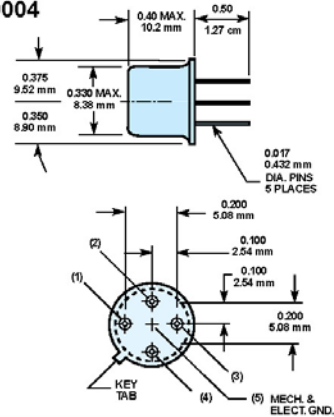

### Functional Schematic

FH-30002, FH-30003



FH-30004

