




J3-30001-30002 3-PORT QUADRATURE HYBRIDS

J3-30001 / 30002


20 to 200 MHz 3-Port Quadrature Hybrids

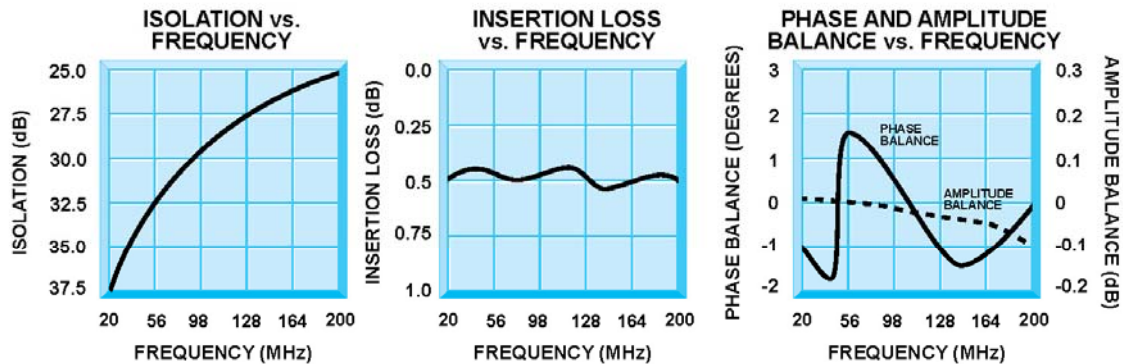

Guaranteed Specifications (-54° to +85°C)

Frequency Range	20 to 200 MHz
Isolation	20 dB Min.
Insertion Loss	1.2 dB Max.
VSWR	1.4:1 Max.
Phase Balance	±3° Max.
Amplitude Balance	± 0.5 dB Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Mechanical Outline

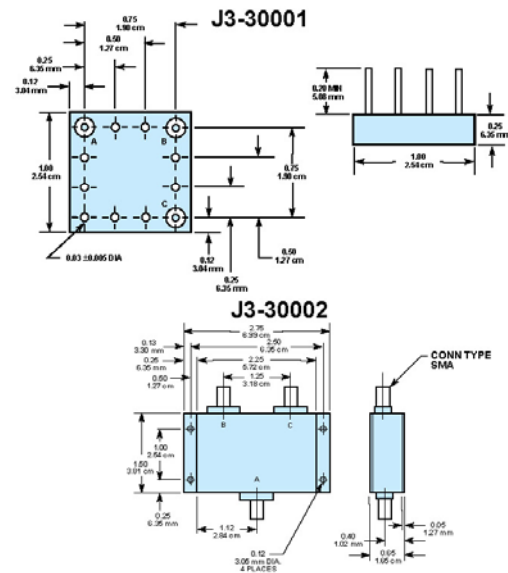

Truth Table

A	INPUT
B	0° OUTPUT
C	-90° OUTPUT

STC Microwave Systems – www.cranae.com
 28 Tozer Road • Beverly, MA 01915
 phone: 978-524-7200 • email: electronics@cranae.com

Revision 13-30001-30002 2005 08252005

STC MICROWAVE SYSTEMS - OLEKTRON
 A CRANE CO. COMPANY

