




J3-40001-40002 3-PORT QUADRATURE HYBRIDS

J3-40001 / 40002 50 to 500 MHz 3-Port Quadrature Hybrids

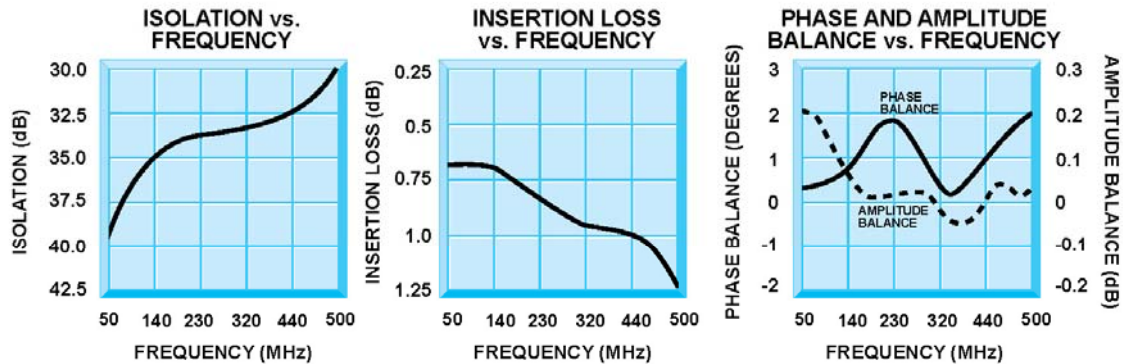


Guaranteed Specifications (-54° to +85°C)

Frequency Range	50 to 500 MHz
Isolation	20 dB Min.
Insertion Loss	1.5 dB Max.
VSWR	1.5:1 Max.
Phase Balance	±3° Max.
Amplitude Balance	± 0.5 dB Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Truth Table

A	INPUT
B	0° OUTPUT
C	-90° OUTPUT

Mechanical Outline

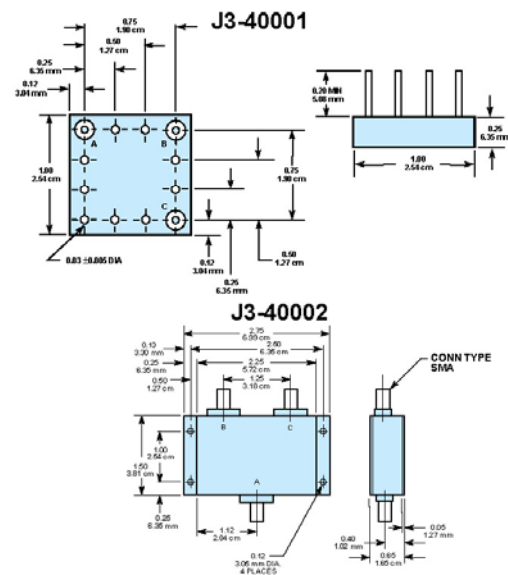

STC Microwave Systems – www.cranae.com
 28 Tozer Road • Beverly, MA 01915
 phone: 978-524-7200 • email: electronics@cranae.com

Revision 13-40001-40002 2005 08252005

STC MICROWAVE SYSTEMS - OLEKTRON
 A CRANE CO. COMPANY

