




# J4-20001 QUADRATURE HYBRID


## J4-20001 20 to 40 MHz Quadrature Hybrid

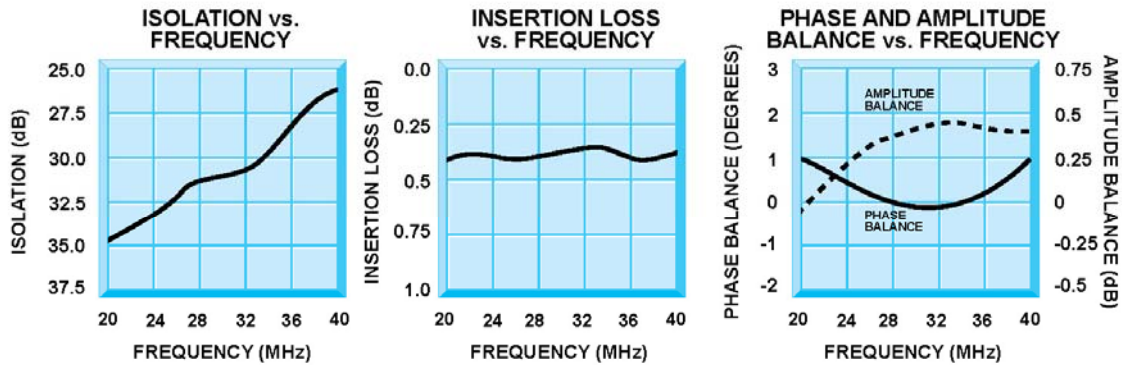

### Guaranteed Specifications (-54° to +85°C)

Frequency Range	20 to 40 MHz
Isolation	25 dB Min.
Insertion Loss	0.5 dB Max.
VSWR	1.2:1 Max.
Phase Balance	±3° Max.
Amplitude Balance	± 0.75 dB Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

### Mechanical Outline

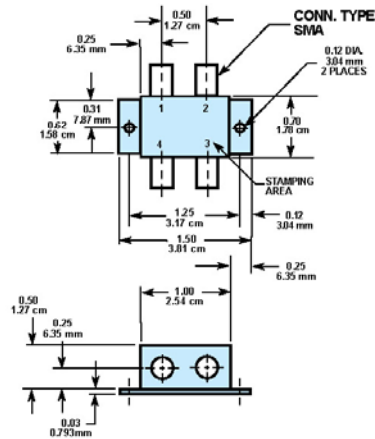

### Truth Table

OUT \ IN	1	2	3	4
1	X	ISOL	0°	-90°
2	ISOL	X	-90°	0°
3	0°	-90°	X	ISOL
4	-90°	0°	ISOL	X

STC Microwave Systems – [www.cranae.com](http://www.cranae.com)  
 28 Tozer Road • Beverly, MA 01915  
 phone: 978-524-7200 • email: [electronics@cranae.com](mailto:electronics@cranae.com)

Revision 11-20001 2005 08252005

STC MICROWAVE SYSTEMS - OLEKTRON  
 A CRANE CO. COMPANY

