


D3-40006 15 dB DIRECTIONAL COUPLER

D3-50004


75 to 1000 MHz 10 dB Directional Coupler

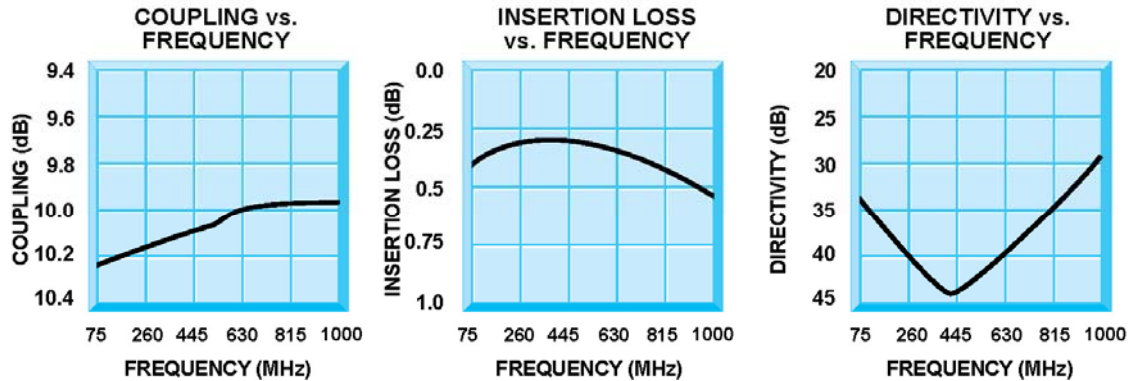


Guaranteed Specifications (-54° to +85°C)

Frequency Range	75 to 1000 MHz
Coupling	10 ± 0.5 dB
Coupling Flatness	±0.5 dB Max.
Insertion Loss	1.0 dB Max.
Directivity	20 dB Min.
VSWR	1.4:1 Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Mechanical Outline

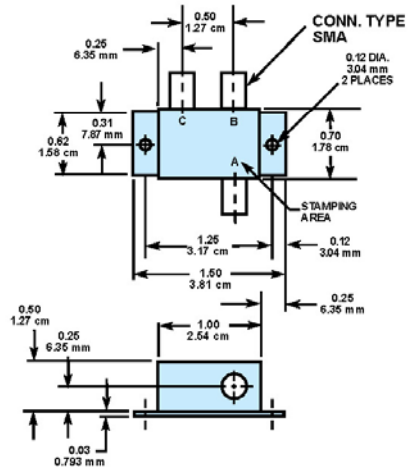

Functional Schematic



STC Microwave Systems – www.cranae.com
 28 Tozer Road • Beverly, MA 01915
 phone: 978-524-7200 • email: electronics@cranae.com

Revision D3-40006 2005.08252005

STC MICROWAVE SYSTEMS - OLEKTRON
 A CRANE CO. COMPANY

