

D4-50002

10 to 1000 MHz 10 dB Bi-Directional Coupler

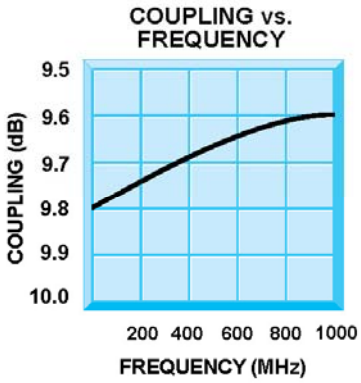

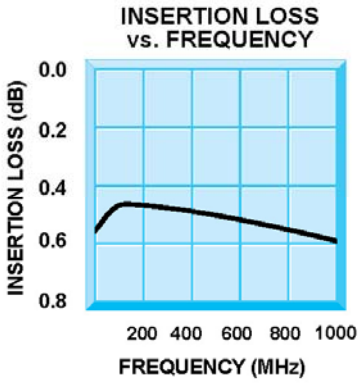

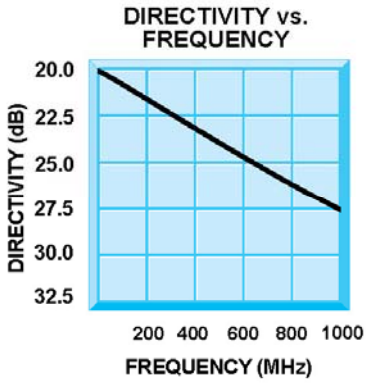

Guaranteed Specifications (-54° to +85°C)

Frequency Range	10 to 1000 MHz
Coupling	10 ± 0.5 dB
Coupling Flatness	±0.5 dB Max.
Insertion Loss	0.65 dB Max.
Directivity	20 dB Min.
VSWR	1.4:1 Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Mechanical Outline

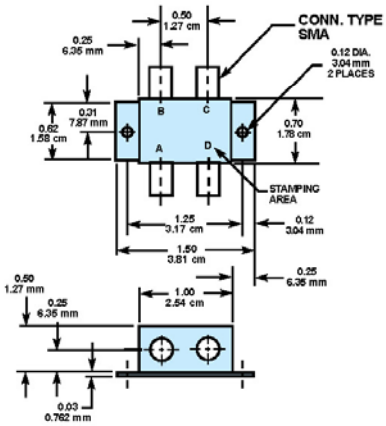

Functional Schematic



STC Microwave Systems – www.craneae.com
28 Tozer Road • Beverly, MA 01915
phone: 978-524-7200 • email: electronics@craneae.com

Revision D4-50002 2005 08252005

STC MICROWAVE SYSTEMS - OLEKTRON
A CRANE CO. COMPANY
CRANE
AEROSPACE & ELECTRONICS